


Order form for washbasins FLOW 450/500

1. Choose your basin (mark your choice):


Take into account the requirements of each basin regards the length (L), width (W) of counter

- | | |
|--|--|
| <input type="checkbox"/> FLOW 450 | <input type="checkbox"/> FLOW 500 |
| W = 450 mm | W = 500 mm |
| W1 = 50 mm | W1 = 60 mm |
| W2 = 110 mm | W2 = 130 mm |
| L = 600-3000 mm | L = 600-3000 mm |
| H = 160 mm | H = 160 mm |
| A + B ≥ 300 mm | A + B ≥ 300 mm |
| A + B + C ≥ 600 mm | A + B + C ≥ 600 mm |

WARNING! Mixer tap holes are not available for the FLOW 450 basin.
Tolerated error of dimensions for basin position and dimensions in the surface +/-5 mm.

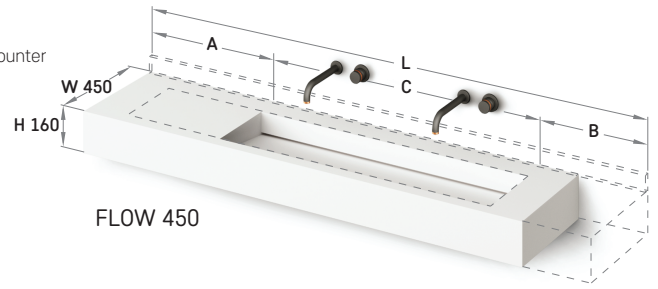


FLOW 450

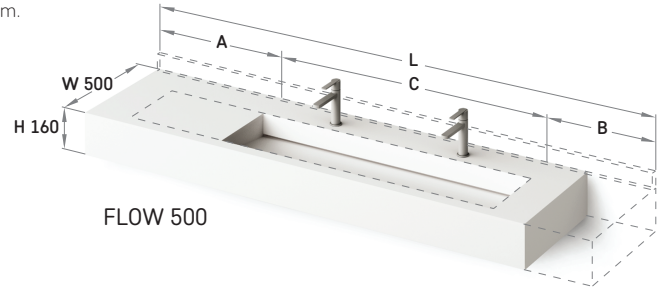


FLOW 500

2. Write down the key measures of washbasin:

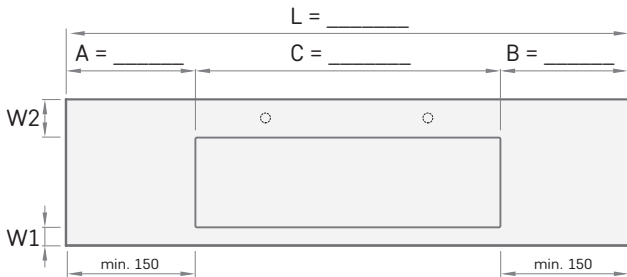


3. Does the sink will have a mixer from the wall or mixer will be located on the basin surface? Specify the location and number of tap holes:

- mixer from wall mixer on the basin surface

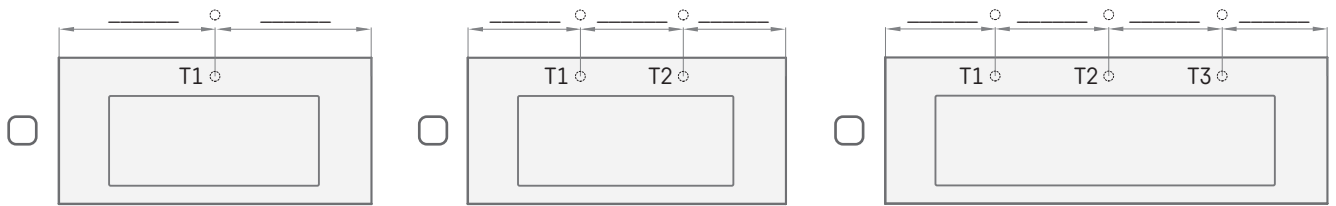

4. Indicate the location and number of syphon holes:




5. Mark if you need integrated backwall rim and wall panel, backwall rim and wall panel (thickness = 12 mm) and length equal to surface length (L):

- backwall rim (h = 30 mm) wall panel h = _____ mm (h = 60 - 400 mm) NO

7. Mark if it is necessary milling (for example, cut for waste bin, soap dispenser, etc.)

- Milling ** NO

6. Mark the basin position:

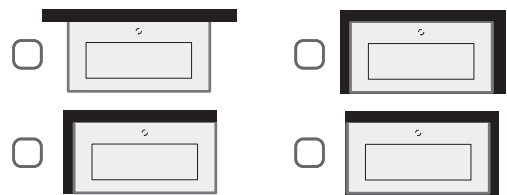

8. Comments:

**** IMPORTANT!** It is required that all the items of the form are filled in and a drawing is included with the order: the position of the basins, the locations of the holes for the installation of mixer taps, if necessary, and the location and number of syphon connection. Washbasins don't have overflow. Milling on the surface requires a drawing. Integrated mounts are included in the price.